



A WORLD LEADER IN FUME
EXTRACTION TECHNOLOGY

AD Base Z

Last Updated on 01.02.2022



The laser companion advantage extraction system for use with the Epilog Zing laser engraver.

The Advantage Base Z has been designed specifically for the Epilog Zing laser engraver. The dimensions of the unit allow the Zing to fit perfectly onto the extractor, effectively doubling it up as a workstation. The distinctive blue finish has been matched with the blue ends of the laser to give a stylish installation.

The unit is also offered with an onboard air compressor to provide the laser with its air assist requirements. All units come complete with an extraction hose kit and compressor link up on compressor models.

Technology



DeepPleat DUO
pre-filter



HEPA filter



Advanced carbon
filter (ACF)
technology



Reverse flow air
(RFA) technology



ProTECT service
plan



SureCHECK
quality standard

Key features of the AD Base Z

Low noise levels
Standard

Stylish colour matches the Epilog Zing laser engraver
Standard

Comes complete with extraction hose kit
Standard

On-board compressor
Optional

Low cost replacement filters
Standard

DeepPleat DUO pre-filter
Standard

VOC gas sensor (Volatile Organic Compound)
Optional


Contact BOFA at <https://bofainternational.com/en/contact/>
<https://bofainternational.com/en/portal/datasheets/ad-base-z/>







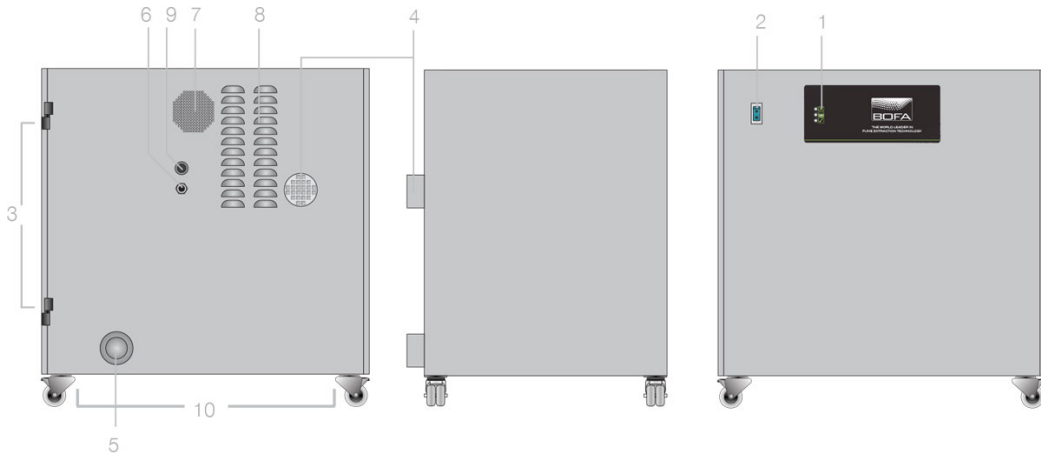

Approvals: REACH and RoHS. See individual product technical data for specific accreditations


Technical specification

- | | | | |
|------------------------------------|--------------------|--------------------------------------|---------------------------------|
| 1. Unit / filter condition display | 2. On / off switch | 3. Door hinge | 4. Extracted air outlet - 75mm |
| 5. Hose inlet connection - 75mm | 6. Power cable | 7. Optional compressor cooling inlet | 8. Motor cooling inlet / outlet |
| 9. Compressed air outlet | 10. Castors | | |



Airflow through filters

-  Chemical filter
-  HEPA filter
-  Pre-filter
-  Clean air
-  Contaminated air
-  Particulate

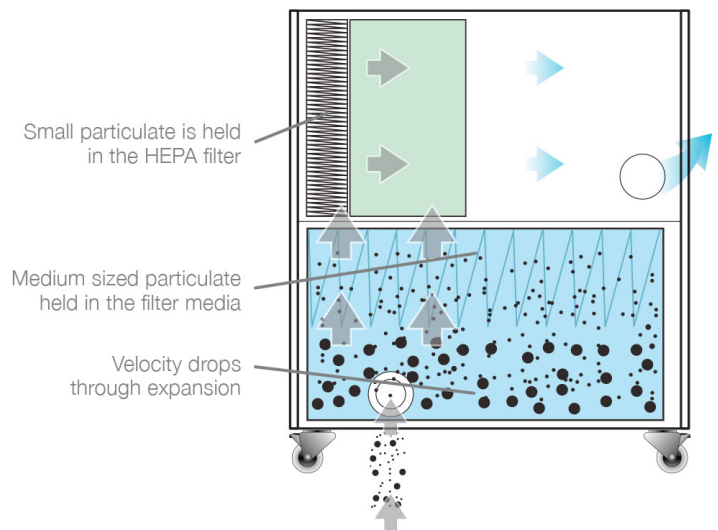

Technical data

	EU	US
Dimensions (HxWxD)	780 x 780 x 600mm	30.71 x 30.71 x 23.62"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Airflow / Pressure	180m ³ /hr / 30mbar	106cfm / 30mbar
Electrical data	230v 50/60Hz Full load current: 0.9 amps / 135w	115v 50/60Hz Full load current: 1.2 amps / 135w
Noise level	< 55dBA (at typical operating speed)	< 55dBA (at typical operating speed)
Weight	71kg	156lbs
Approvals	UKCA and CE	UKCA and CE

DeepPleat pre-filter specifications

Surface media area	12m ² approx (129.12 ft ²)
--------------------	---------------------------------------------------

DeepPleat pre-filter specifications

Filter media	Borosilicate
Filter media construction	2 stage maxi pleat
Filter housing	Zintec mild steel
Filter efficiency	95% @ 0.9 microns

Combined filter specifications

HEPA filter media	Borosilicate
HEPA media construction	Maxi pleat construction with glue bead spacers
Surface media area	2m ² approx (21.52 ft ²)
Filter housing	Mild steel
Treated activated carbon	9kgs (19.8 lbs)
Filter efficiency	99.997% @ 0.3 microns

Part numbers

Model	Voltage	Part no.	VOC monitoring	Compressor
AD Base Z powder coated	230V	L1542A	A2003	A2007
	115V	L1541A	A2003	A2007

Replacement filters

Model	DeepPleat pre-filter	Combined filter
AD Base Z	A1030045	A1030050

Hose kits

100-75mm kit - A1020386
1.5m 75mm Flexible hose
1 x 75mm Connection cuff
1 x 100 - 75mm Reducer

Other languages

AD Base Z
[French](#)

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Important Notice: Many factors beyond the control of BOFA can affect the use and performance of BOFA products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate

the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.

Think before you print! Please consider the environment before printing this document.

